




2 part split frame for subsequent installation

Profile

- Wall type brick wall stud wall
- Design 2 part split
- Steel strength 1,5 mm 2 mm
- Material / Surface galvanized and primed powder coated RAL stainless steel V2A (1.4301) stainless steel V4A (1.4571)
- Architrave front / back mm / mm
- Backbend front / back 10 mm / 10 mm mm / mm
- Rebate width (FA) 15 mm mm
- Rebate depth (FT) 28,5 mm (rebated) 46,5 mm (flush) mm
- Rebate type single rebate double rebate
- Handle height (DH) 1050 mm mm
- Latch + lock hole cut-out standard latch adjustment
- Metre mark pre-punched mm
- Foundation bedding (BE) 0 mm mm
- Spacer rail screwed under the frame
- Hollow chamber seal light grey black white brown
- APTK-lip seal black
- Hinge pockets BTV 10200 (mortar impervious) 2 x
 V 8618 (easy installation) 2 x
 BVN 11160 (160 mm 3D) 2 x
 BVN 11100 (100 mm 3D) 2 x
 BVX 11000 (VX 3D) 2 x
 BVN 11160K (160 mm 3D) 2 x
 BSW VB 237 (3D) 2 x

- Others
- Frame type wBud Type "K" wAud Type "E" wBud Type "VK" wBud Type "VKX"

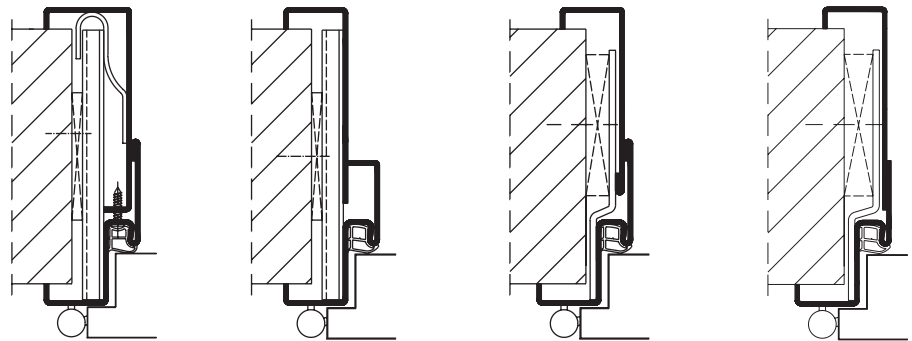

● predetermined ○ standard □ choice

Position	Quantity	Description

Position	Quantity	RRB (standard width)	RRH (standard height)	Frame mouth opening